




VueLite

Manufacturing · Quality · Innovation

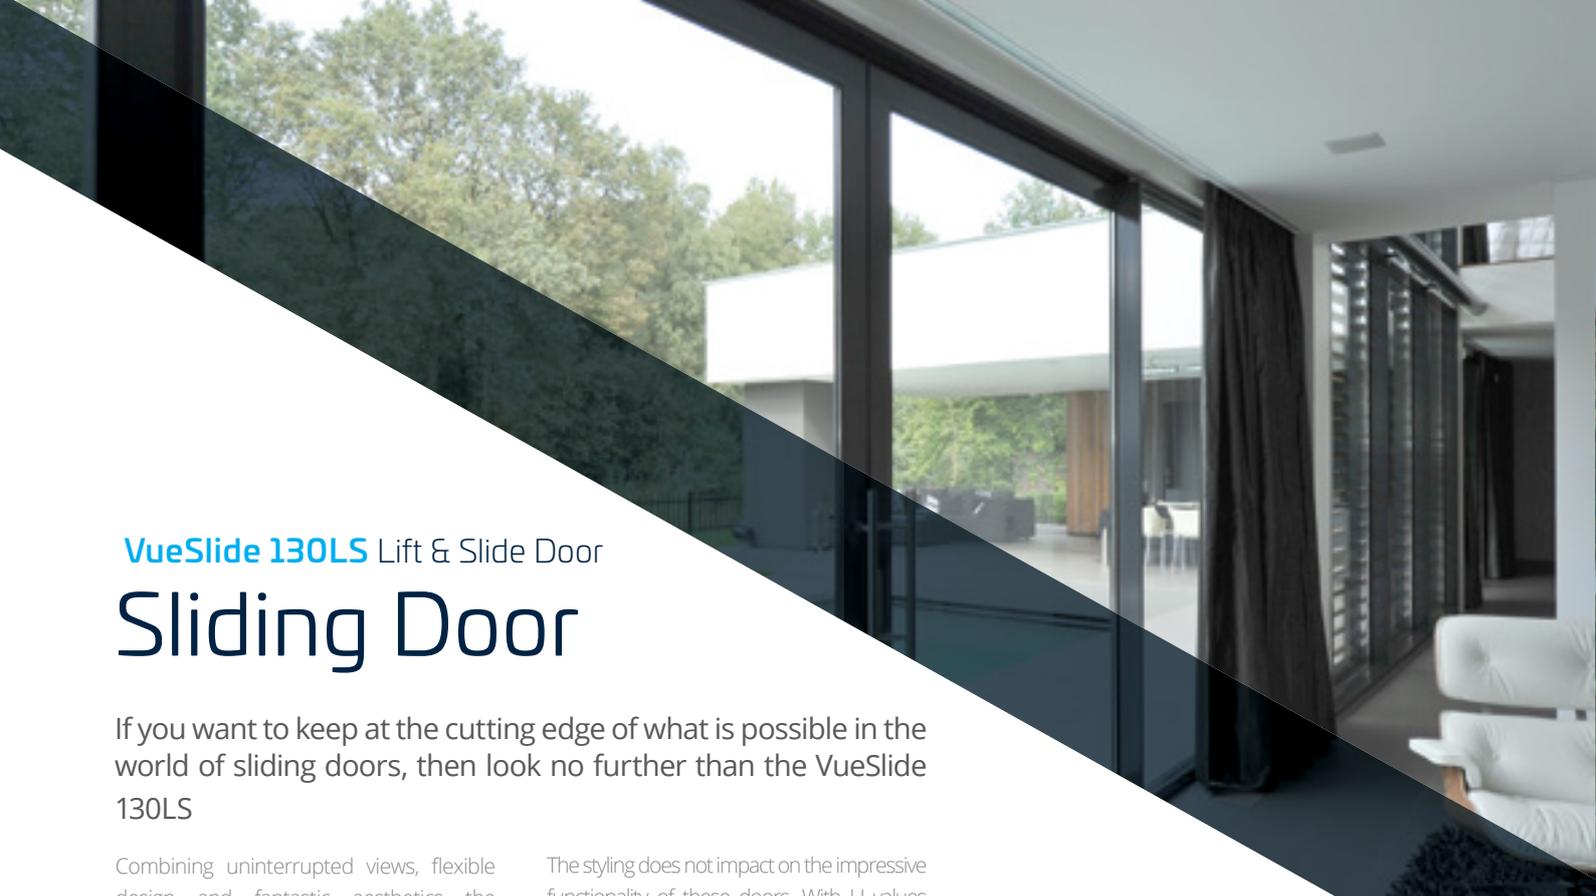

VueSlide 130LS Lift & Slide Door

Sliding Door

If you want to keep at the cutting edge of what is possible in the world of sliding doors, then look no further than the VueSlide 130LS

Combining uninterrupted views, flexible design and fantastic aesthetics the VueSlide 130LS also has an impressive specification.

Despite the slim sightlines the VueSlide 130LS carries up to 300kg of weight allowing you to span large apertures with fewer panels and reach heights of up to 2700mm. The size of double or triple glazed units does not affect the smooth single finger operation of the opening mechanism, and creates beautiful light open spaces.

The cornerless opening allows you to open up the interior of a property like never before and creating a breath taking architectural statement.

The styling does not impact on the impressive functionality of these doors. With U values as low as 1.3 and weathering performance of up to 750pa, the doors withstand most conditions. However for extreme marine environments enhancements are available.

The VueSlide 130LS is available in the full RAL range of colours with dual colour also available as well as Coatex textured finish and a selection of designer handles the doors can truly be customised.

Together with high energy performance and the stylish customisable looks, our doors make an excellent solution for the low-energy contemporary architecture.





VueSlide 130LS Lift & Slide Door

Lift & Slide

*Pull Up
to lock*



*Pull Down
to open*



*Corner section of the VueSlide 130LS
Aluminium low threshold*

From the closed position (at midnight/ pointing vertically), by turning the handle 180° into the sliding position, the door is raised by several millimetres. In order to close the sash, slide it into the closed position and lower it again by turning the handle 180° from the downward to the upward position. If the handle has a key cylinder, unlock it before operating the handle.

The stainless steel rollers are effortlessly able to carry up to 300kg a pane. This allows for panels to go up

to 2700mm in height and 2500mm wide giving you uninterrupted views.


It is possible to put the sliding system into a locked ventilation position. Raise the handle +/- 15mm before the final close position to engage the locks into whilst leaving a small gap for ventilation.




VueSlide 130LS Lift & Slide Door

Door Options

TWO TRACK

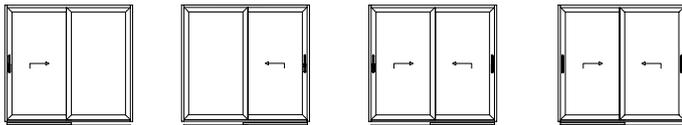

STYLE 001 STYLE 002 STYLE 003 STYLE 004

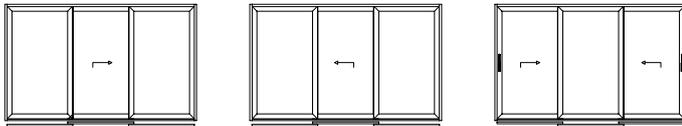


STYLE 005 STYLE 006 STYLE 007




STYLE 008 STYLE 009


THREE TRACK

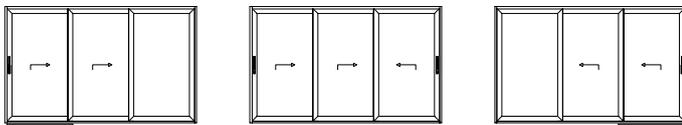

STYLE 010 STYLE 011 STYLE 012

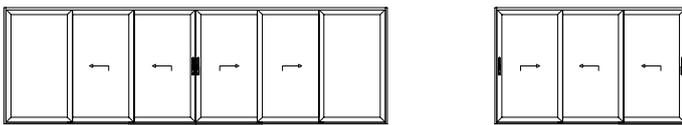

STYLE 013 STYLE 014

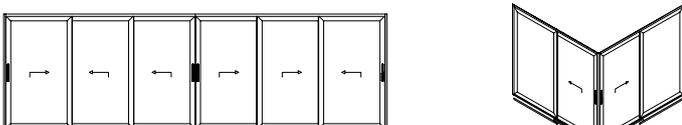

STYLE 015 90 DEGREE CORNER OPTION

Creating a world of design possibilities, the VueSlide 130LS is a premium insulated Lift and Slide door system combining high weather performance with enhanced security and great aesthetics.

One of the features that sets this sliding door system ahead of the rest is a clever open-corner option where two sliding units meet at a corner. When closed, the double-weather gaskets protect against the elements.

The system is designed with ease of use in mind and the two doors glide apart to open up the whole corner with no fixed post to get in the way or obstruct the view. The result is a stunning feature where the ceiling appears to defy gravity, floating above a truly panoramic opening to the garden.



VueSlide 130LS Lift & Slide Door

Specifications

Vueglide - push up to 300kg with two fingers

Colours - Polyester powder coated textured paint available in any RAL colour to a standard 60 microns finish.

Vuelock - Siegenia 4 point locking is secure and burglar resistant. Tested to RC2 (EN1627-1630) standard

10 yr Guarantee*

Stainless steel rollers - robust and durable

Teflon coated gaskets - dirt doesn't stick

Hand engineered and finished - All joints are finished with a 2 part adhesive for extra strength

Slim sightlines Narrow (69mm) or Standard (98mm)

Lift and slide operation

Dual or Triple rail slider

Outerframe - Depths 139mm (Dual rail) & 210mm (Triple Rail)

Low threshold - level off floors without compromising on weather performance 3 options (Low, Standard, Enhanced)

Maximum Height per panel 2700mm, width variable on other options.

Maximum glass weight 300kg per panel

U values from as low as 1.38 W/m²k

Wind load - tested to 1200pa upto 1600pa (if reinforced)

Airtightness - (to EN12207) 600pa

Watertightness - (to EN12208) up to 750 pa

Glazing - can accommodate sealed units up to 42 mm

Luxury handles in 8 finishes

Standard handles in a choice of silver, black, white and RAL colours

Fibreglass reinforced polyamide breaks for enhanced thermal performance - UF value of 2.35 w/m²k.

* *Limitations of warranty*

VueSlide 130LS Lift & Slide Door

Handle Options

The standard option is a robust elegant design available standard silver, black or white. This can also be painted to match any RAL colour. As with all sliding doors the inside requires a full handle but the outside can be equipped with a full handle or just a recessed cup handle.

The result is a minimal, classical and rational design that will give the Reynaers systems a unique touch.

Purity is the luxury range and comes in 2 different styles. Design is a stylish flat handle and comfort has a curved end. Both handles are made of a brand new material called PURA which is fully recyclable, 100% ecological, non-corrosive and anti-allergic.



Standard Door Handle Options



Colour Options



Purity Door Handle Options



Colour Options



VueSlide 130LS Lift & Slide Door

Marine Enhancements

For enhanced protection in aggressive or exposed environments (Marine or Industrial) VueLite can offer additional protection so that you can rest assured that our product will hold up against the elements.



Corner section of the VueSlide 130LS aluminium enhanced threshold with reinforced meeting stile



60 Micron Polyester Powdercoat Finish as standard to all VueLite doors with the addition of pre-anodisation of all sections prior to the Powder Coating process with an artificial oxidation treatment. This specialised procedure offers unrivalled performance throughout the industry and is performed in accordance with the strict guidelines of the European Qualanod standard.



Coatex Textured finish is an exclusive alternative to the standard paint finish. Available in a range of colours, offering a contemporary metallic look combined with improved scratch resistance of up to 60%. Furthermore, profiles lacquered with Coatex only require half the maintenance of traditional paint because of its microstructure that gives the surface a water-repellent character



All VueLite handles are polyester powder coated with no exposed metal surfaces, offering protection in corrosive environments




Enhanced Water Threshold Options. These are not available on all options but where installed offer a minimum of 750PA water tightness as opposed to 450PA as standard.



The Purity range of handles is also 100% recyclable 100% hypoallergenic, 100% ecologic and 100% non-corrosive – perfect for aggressive environments.





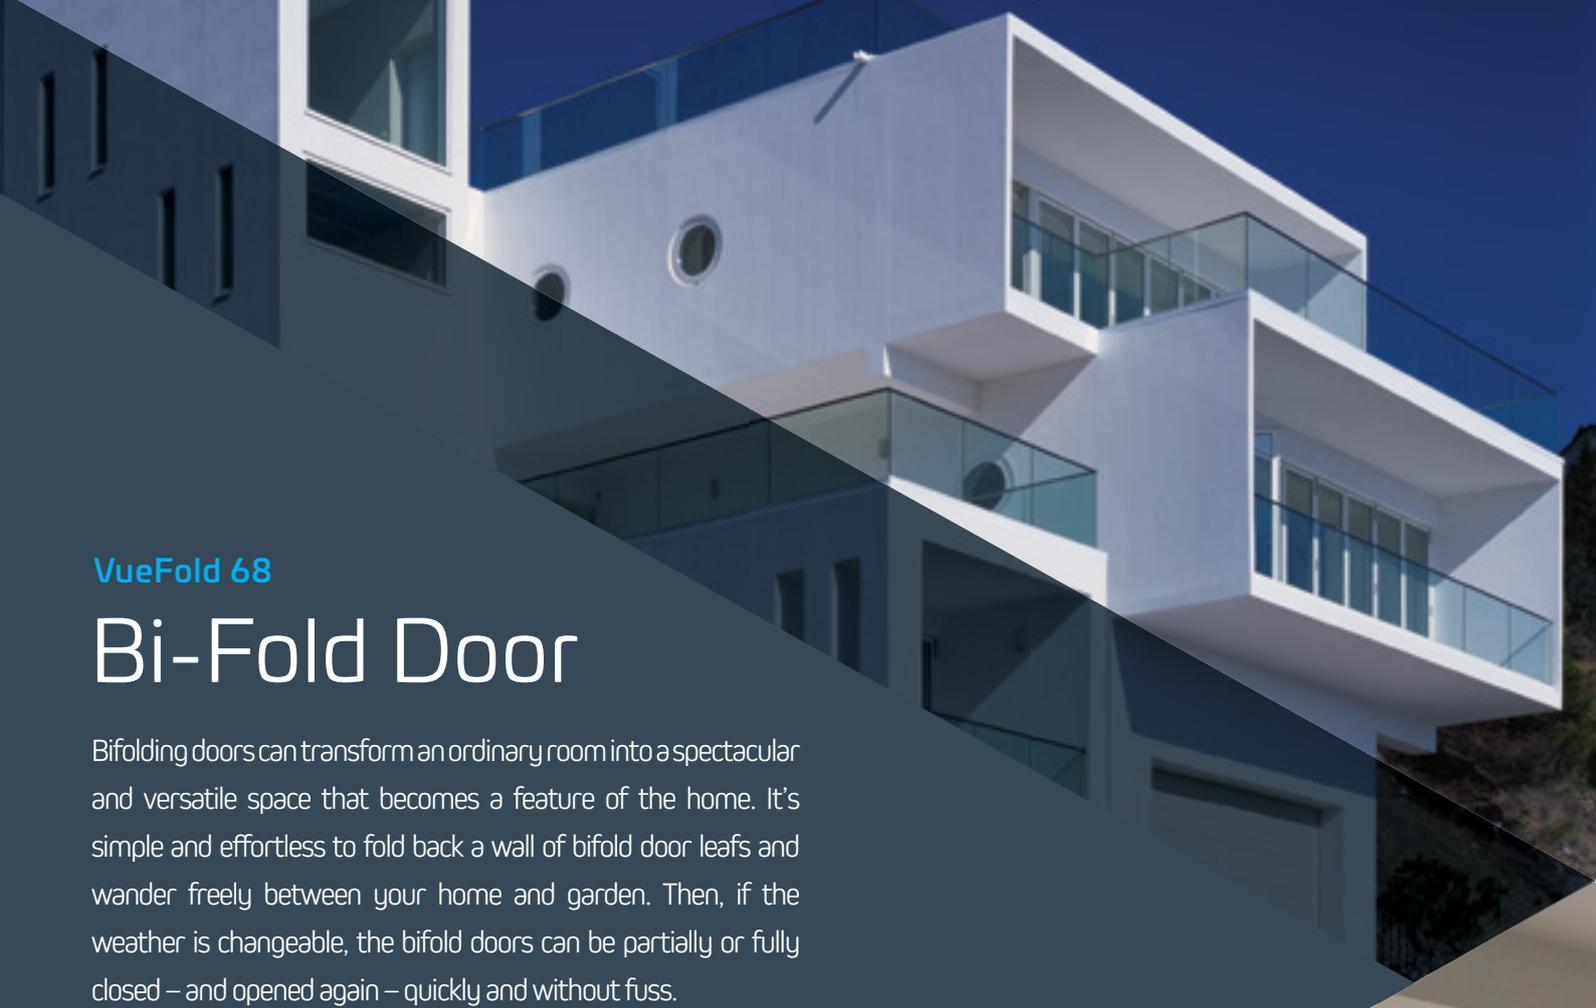

VueFold 68

Bi-Fold Door

Bifolding doors can transform an ordinary room into a spectacular and versatile space that becomes a feature of the home. It's simple and effortless to fold back a wall of bifold door leafs and wander freely between your home and garden. Then, if the weather is changeable, the bifold doors can be partially or fully closed – and opened again – quickly and without fuss.

Whether you're throwing a party on a warm sunny day, just nipping into the garden on a cold winter morning, or simply enjoying the view from your cosy living room, our state-of-the-art aluminium bifold doors have the flexibility to combine sensible practicality with beautiful aesthetics that make a design statement coupled with a choice of colours, door options and furniture makes the VueFold 68 an excellent choice for your project.





VueFold 68 Bi-Fold Door

Handle Options

Standard bi-folding handles are functional and aesthetically pleasing, and come in three standard colours.

For people who desire ultimate design and optimal quality, Reynaers

offer a unique series called Purity. This range combines next-generation material and mechanical properties with the superior Italian designer Leo De Carlo, who previously worked in the studios of Philippe Starck.

Standard Door Handle Options



Purity Door Handle Options



Colour Options



Eclipse

Sapphire
Black

Or

Belgian
Chocolate



Obsidian

Polaris

Moonlight
White

Lithium



VueFold 68 Bi-Fold Door

Door Options

1 PANEL

1-1-0



2 PANELS

2-0-2





2-1-1




3 PANELS

3-0-3




4 PANELS


4-0-4



4-1-3




4-2-2




5 PANELS


5-0-5



5-1-4



5-2-3




5-1-4




6 PANELS


6-0-6




6-1-5



6-3-3




6-2-4




7 PANELS


7-0-7




7-1-6



7-2-5



7-3-4



Contemporary architecture demands both the highest performance levels and flexibility of styling. The VueFold 68 Bi-Folding door offers you the freedom of design with 1 to 7 leaf options, slim sight line of only 131mm and 4 threshold solutions to suit your environment.



VueFold 68 Bi-Fold Door

Specifications

Vuecoat – for enhanced marine protection, aluminium profiles can be pre-anodised before painting

Coatex textured paint which is 60% more scratch resistant paint is an optional extra

Vuelock - locking system tested to PAS 24 standard

10yr guarantee*

Vuetight - Interlocking weather - seal - keeps bad weather out - even around the hinges

Hard engineered and finished – all joints are bonded with a 2 part adhesive for extra strength

Visible width: Slim sight lines Frame to vent 100mm, vent to vent 131 mm

Overall frame system depth - 68mm

Doors opening: inward or outward opening to suit your needs

One to seven panel combinations

Four threshold solutions allowing you to balance your day to day needs with weather performance

Threshold heights: from 0 mm -74 mm

Airtightness up to Class 4 EN12208

Maximum height per panel – 2500mm

U values as low as 1.1 depending on size, configuration and sealed unit performance.

Wind load resistance EN12211 EN12210 Class C2

Water tightness EN12208 up to 600 pa Class 9A

Maximum panel weight - 90 kg per panel

Glazing - 12-55 mm

Adjustable side profiles for ease of installation

Glazing - can accommodate sealed units up to 42 mm

Luxury handles in 8 finishes

Standard handles in a choice of silver, black, white and RAL colours

Fibreglass reinforced polyamide breaks for enhanced thermal performance – UF value of 2.35 w/m2k.

* *Limitations of warranty*







VueLite

Manufacturing · Quality · Innovation



sales@vuelite.co.uk | 01392 268 080 | vuelite.co.uk